


**23rd INTERNATIONAL CONFERENCE  
ON  
CEMENT MICROSCOPY**

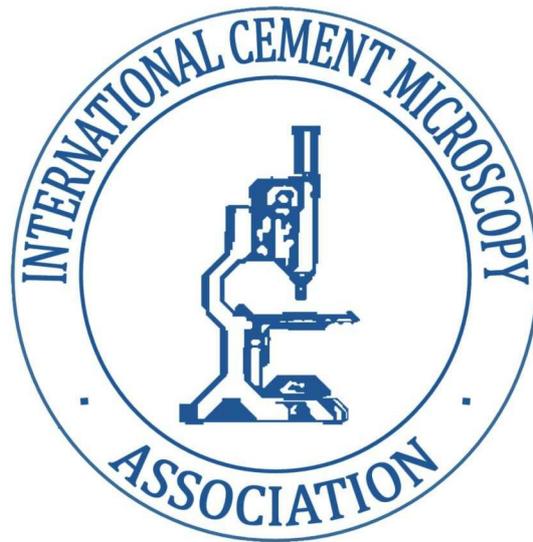

**April 29 - May 3, 2001  
Sheraton Upton Hotel  
Albuquerque, New Mexico  
USA**

ISBN: 1-930787-20-0

## Table of contents

C. Buchanan	Effect of Kiln Speed on Size Relationships of the Silicate Crystals in Type I Portland Cement Clinker at Ash Grove Cement's Durkee, Oregon Plant
A.M. Harrison, N. B. Winter	Flux Phase Compositions in Portland Cement Clinker
C. Fleming, B. Caveny, R. Morgan	Chemical Admixture for Sulfate Resistance of Hydrated Oilwell Cements, Part II
S. Sahu, A. Snyder, S. Badger, R.J. Lee	Use of Water to Cement Ratio and Point Count Analyses to Determine Mix Designs of Hardened Concrete
C. Famy, K.L. Scrivener, A.R. Brough	Microstructural and Chemical Development of Heat- Cured Concretes and Mortars
C. Hofheinz, D. Knofel, F. Winnefeld	Effects of Post-Hydrating Portland Cement Particles in the Hardened Cement Matrix
E. Moulin, S. Sabio, V. Broyer	Effect of SP Type on Ettringite Morphology and on the Rheology of Portland Cement Mortars as a Function of Type of Added Calcium Sulfates
T. Cerulli, C. Pistolesi, C. Maltese, D. Salvioni	Effects of Shrinkage Reducing Admixtures on the Physical Mechanical Properties of Mortars
R. Uribe Afif, J. Flores Martinez	The Indirect Effects of the Use of Mineral Additives in the Durability and Microstructure of Concrete Paste, Exposed to Abrasion
A-M. Marion, J. Daube, R. Smitz	The Stability of Pyrite in Calcareous Aggregate: Investigations in Old Concrete Structures
D. Cong, F. Serafin, L. Roberts, R. Comeau, M. Gardner, W. R. Grace	A Comprehensive Petrographic Investigation of a Severely Deteriorated Concrete Utility Vault
P.E. Stutzman, D. S. Bright, E. J. Garboczi	Finite Element Stress Computations Applied to Images of Damaged Concrete: A Possible New Diagnostic Tool for Concrete Petrography
P. Türker, K. Erdogdu, B. Erdogan	Investigation of Fire-Damaged Concrete with Different Types of Aggregates
M. Kawamura, H. Fuwa	Effects of Lithium Salts on ASR Gel Composition and Expansion of Mortars
O. Blask, D. Knofel	Connection Between Rheological and Microstructural Changes During Hydration of Cement Pastes
F. Cella, T. Cerulli, D. Salvioni, S. Stella	Morphological Variation of Cement Paste Microstructure Due to the Use of Admixtures
S. L. Marusin	Misinterpretation of X-Ray Elemental Analysis of Concrete Due to Fly Ash and Silica Fume Contents
J. Blanchette, M. Dessureault, F. Slim	ASTM C 114 Qualification Test Method by Improving Analytical Results Using Fused

	Beads Technique
J. K. Galinat, V. Ramakrishnan, S. S. Bang	Concrete Crack Remediation by Polyurethane-Immobilized <i>Bacillus Pasteurii</i>
B. Walk-Laufer, D. Knofel, S. G. Zurn, D. Hums, M. Huber	SEM-Investigations on the Microstructure of Steam Cured Building Materials
R. Uribe Afif, R. Rodriguez Camacho, J. Flores Martinez, H. Montano Roman	Physical and Chemical Characteristics of Aggregate Material Passing the Mesh 75 $\mu\text{m}$ (#200) and its Influence in the Inhibition of the Alkali-Silica Reactivity in Mexico City
C. W. Baumgart, K. D. Linder, S. P. Cave	An Automated, Image Processing System for Concrete Evaluation
D. Herfort, I. A. Juel	The Mineralogy of Sulfate and Sea Water Attack on Concrete Interpreted From EPMA Analysis
M. A. Al-Shafei	A Case Study of Ettringite Induced Microcracking of Concrete at a Waste Water Treatment Plant
U.H. Jakobsen, N. Thaulow	Sulfate Attack as Observed by Optical and Scanning Electron Microscopy
S. Sahu, A. Snyder, S. Badger, R.J. Lee	Depth Profiling and Phase Discrimination in Deteriorated Concrete Utilizing Scanning Electron Microscopy with Automated Point Count Analysis
J. Carrillo-Morris	Impact of Amorphous and Crystalline Silica on Pyroprocessing
A. Blanco, A. Centeno, C. Cadenas, J. Soto	Relationship Between Mechanical Properties and Microstructure of Cement with Fiber for Multilateral Wells
A. Santos-Arceo, C. Gaytán	"In-House" Image Analysis Software: A Comparison Study, For a Fast and Reliable Automatic Microscopy Analysis
A. K. Crumby	SEM Microstructural Studies of Cementitious Materials: Sample Preparation of Polished Sections and Microstructural Observations With Backscattered Images – Artifacts and Practical Considerations
M. Radonjic, G. Allen, A. Hughes, N. Elton, J. Hooper	In-Situ Observation of Lime Paste Carbonation in CO <sub>2</sub> Environment Scanning Electron Microscopy (ESEM)
M. Davidts	Fused Beads for Better XRF Analytical Results in Cement Application

# EFFECT OF KILN SPEED ON SIZE RELATIONSHIPS OF THE SILICATE CRYSTALS IN TYPE I PORTLAND CEMENT CLINKER AT ASH GROVE CEMENT'S DURKEE, OREGON PLANT

Chuck Buchanan  
Ash Grove Cement, Durkee Plant  
33060 Shirttail Creek Road  
Durkee, Oregon 97905

## ABSTRACT

The time that a clinker nodule spends in the burning zone of the kiln, also known as the residence time, can have quite an effect on the microstructure of the resulting clinker. The kiln speed, expressed in rpm, or revolutions per minute, controls the residence time. This means that the faster the kiln speed, the lower the residence time will be. Reflected light microscopy can be used to track resulting changes in the clinker microstructure as the kiln speed is increased, and estimates can be made as to the possible effects these changes may have on the performance of the cement made from that clinker. Crystal size, reactivity, and structure, as well as porosity of the nodule itself, can all be improved with an increase in kiln speed, and some detrimental conditions can also be at least partly remedied. Overburning can, for example, be at least partly counteracted by increasing the kiln speed and decreasing the residence time. However, there appears to be a point of diminishing returns which is eventually reached, after which no apparent structural changes will be observed if kiln speed is increased further. A marked change in crystal size relationships was observed in the clinker from Ash Grove Cement's Durkee, Oregon plant in the latter part of 1999 and the early part of 2000, and the above mentioned "point of diminishing returns" seemingly reached.

# FLUX PHASE COMPOSITIONS IN PORTLAND CEMENT CLINKER

Arthur Harrisson<sup>1</sup> and Nick Winter<sup>2</sup>

<sup>1</sup>Rugby Cement, Crown House, Rugby. CV21 2DT

<sup>2</sup>WHD Microanalysis Consultants Ltd, Iken House, Suffolk Drive, Rendlesham, Suffolk  
IP12 2TW

## ABSTRACT

Electron optical analyses of the flux phases in Portland cement clinker have frequently shown the presence of three distinct areas within the flux, corresponding to the aluminate phase, the ferrite phase and a phase which appears from x-ray microanalysis to be chemically between the two.

The phases have been examined in a variety of industrial clinkers produced under known conditions, using methods including optical and x-ray microanalysis. From the results some interpretations concerning the likely origin and conditions for formation of the intermediate composition material are considered.

## Chemical Admixture for Sulfate Resistance of Hydrated Oilwell Cements: Part II,

### Conclusion of Study

Prepared for presentation at the Twenty-Third International Conference on Cement Microscopy, Albuquerque, New Mexico, April 29-May 3, 2001.

Carole Fleming, Chevron Petroleum Technology Company; Bill Caveny and Rickey Morgan, Halliburton Energy Services, Inc.

### Abstract

This paper continues to explore the feasibility of using chemical admixture to give hydrated oilwell cements resistance to sulfate attack, and presents final and favorable results of tests performed with the admixture. Results observed after 1 year of exposure to sulfates indicate that treating cements with 1% of the admixture by weight of cement (BWOC) helps improve their resistance to sulfate attack.

Light microscopy, environmental scanning electron microscopy (ESEM), expansion bars, and compressive-strength measurements were used to study sulfate attack on several hydrated-cement designs. Samples were aged in a 5% sulfate solution at 39°C, and were removed periodically over 12 months for measurement and evaluation. The paper reports findings of the study and shows (1) photomicrographs of samples and (2) the physical measurements recorded. This concludes the work that was published in the proceedings of the Twenty-Second International Conference on Cement Microscopy.

**DEPTH PROFILING AND PHASE DISCRIMINATION IN DETERIORATED  
CONCRTE UTILIZING SCANNING ELECTRON MICROSCOPY WITH  
AUTOMATED POINT COUNT ANALYSIS**

S. Sahu, A. Snyder, S. Badger, and R.J. Lee

RJ Lee Group, Inc.  
350 Hochberg Rd., Monroeville PA 15146  
[ssahu@rjlg.com](mailto:ssahu@rjlg.com)

**ABSTRACT**

Automated point count analysis utilizing scanning electron microscopy (SEM) associated with energy dispersive spectroscopy (EDS) allows for the discrimination of various phases by chemical composition. Phases are discriminated by energy dispersive spectroscopy with “rule” files developed for all phases of interest. Automatic control of the SEM stage and recording of coordinates also allows for the mapping of individual phases by location within a polished concrete section. In this manner, relative quantities of each phase (i.e. ettringite, monosulfate, CSH) may be plotted with respect to depth of the concrete from the surface. Automation of the analysis is achieved by fixing an array of points over selected “standard” magnified paste images. The computer then obtains EDS data from each point within a given image. Images and EDS point data can be electronically stored for subsequent review. Therefore, the frequency with which a given phase coincides within the regular grid system of points allows variations in paste composition to be observed. Comparisons of automated to manual SEM analysis are presented.

# MICROSTRUCTURAL AND CHEMICAL DEVELOPMENT OF HEAT-CURED CONCRETES AND MORTARS

C. FAMY<sup>a,b</sup>, K. L. SCRIVENER<sup>a</sup>, A. R. BROUGH<sup>b,c</sup>

<sup>a</sup>Lafarge, Central Research Laboratory, 38291 Isle d'Abeau, France.

<sup>b</sup>Formerly, Department of Materials, Imperial College, London, SW7 2BP, UK.

<sup>c</sup>Departments of Civil Engineering and Materials, University of Leeds, Leeds, LS2 9JT, UK.

## ABSTRACT

Ordinary Portland cement mortars subjected to elevated temperatures ( $>70^{\circ}\text{C}$ ) may occasionally exhibit expansion on exposure to moisture at room temperature. This deterioration process is widely referred to as delayed ettringite formation or DEF because ettringite, which normally forms at early ages of hydration, is formed on a delayed basis at much later ages.

It has been claimed that the expansion is a result of the delayed formation of ettringite. However delayed ettringite is observed in heat-cured mortars that are not expansive. Thus the presence of ettringite in a damaged mortar is not a sufficient condition to show that ettringite has caused the damage since ettringite formed at late ages is generally present, whether or not expansion occurs.

This paper presents the changes occurring in the chemistry and microstructure of expanding and non-expanding heat-cured mortars made in laboratory. A mechanism of expansion is proposed and the necessary conditions for expansion to occur in heat-cured mortars or concretes are discussed.

# **EFFECTS OF POST-HYDRATING PORTLAND CEMENT PARTICLES IN THE HARDENED CEMENT MATRIX**

C. Hofheinz<sup>\*</sup>, F. Winnefeld<sup>+</sup>, D. Knöfel<sup>\*</sup>

<sup>\*</sup> Universität-GH Siegen, Institut für Bau- und Werkstoffchemie, D-57074 Siegen, Germany

<sup>+</sup> Eidgenössische Materialprüfungs- und Forschungsanstalt (EMPA),  
CH-8600 Dübendorf, Switzerland

## **ABSTRACT**

In this research project different Portland cement pastes with low water/cement ratios - as used in high performance concretes - were stored under water at 8°C, 20°C and 50°C for up to 360 days. Afterwards the samples were investigated with regard to a possible expansion and change in microstructure due to secondary hydration of clinker relicts with additional water in the hardened cement paste. Industrial and laboratory made Portland cements with lime saturation factors between 0.85 and 0.99 and specific surfaces between 2300 and 4100 cm<sup>2</sup>/g were used to prepare cement pastes with w/c-ratios of 0.35 and 0.20. Beside the length change the following examinations were carried out: X-ray diffraction, mercury intrusion porosimetry, scanning electron microscopy, metallographic UV-microscopy.

## **ZUSAMMENFASSUNG**

In diesem Forschungsprojekt wurden verschiedene Portlandzementsteine mit niedrigen Wasser/Zement-Werten – wie in Hochleistungsbeton verwendet – für bis zu 360 Tage bei 8°C, 20°C und 50°C unter Wasser gelagert. Danach wurden die Proben im Hinblick auf eine Expansion und Änderung der Mikrostruktur untersucht, die darauf zurückzuführen ist, daß nicht hydratisierte Portlandzement-Partikel mit von außen zugeführtem Wasser in der erhärteten Zementsteinmatrix reagieren. Es wurden industriell hergestellte Zemente und Laborzemente mit unterschiedlichen Kalkstandards (85 bis 99) und Feinheiten (2300 bis 4100 cm<sup>2</sup>/g) verwendet um Zementsteinproben mit w/z-Werten von 0.35 und 0.20 herzustellen. Neben der Längenänderung wurden folgende Untersuchungen durchgeführt: Röntgenbeugungsanalyse, Quecksilberdruckporosimetrie, Rasterelektronenmikroskopie und Auflicht-UV-Mikroskopie.

# EFFECT OF SP TYPE ON ETTRINGITE MORPHOLOGY AND ON THE RHEOLOGY OF PORTLAND CEMENT MORTARS AS A FUNCTION OF TYPE OF ADDED CALCIUM SULFATES

E. Moulin, S. Sabio and V. Broyer  
Lafarge Central Research Laboratory

## ABSTRACT

Concrete technology has improved, widening the range of applications of this material. For instance, high performance properties such as high fluidity have been in great demand in concrete technology over the last few years. Therefore, a number of new superplasticizers (SP) have been developed and applied to important construction projects. In this regard, polycarboxylate-type superplasticizers (PCP) have been more widely used recently.

In order to have more insights on the effect of the PCP-type SP as a function of the nature of added sulfates on Portland cement fluidity, a comparative study has been carried out in 2 steps.

In the first part of the study, the effects of a common polynaphtalenesulfonate (PNS) - type SP and of two PCP - type SP on the formation of ettringite have been compared. The ettringite has been prepared on mixing solutions of  $Al_2(SO_3)_3$  and  $Ca(OH)_2$  in presence or not of SP. The morphology of ettringite been examined by SEM and the SP adsorption has been monitored.

In the second part of the study, the effect of the 3 SP's as a function of the nature of added calcium sulfates (gypsum, plaster, anhydrite) and  $C_3A$  content (2 levels considered) in Portland cement has been compared through the early rheological behavior of mortars at a W/C of 0.5. Concurrently, early SP adsorption has been measured in the mortars.

Overall, the disturbance of the ettringite morphology is somewhat different between the SP's : an ill-defined mass being observed in presence of PNS and small needles in presence of PCP-type SP compared to long and sharp needles in the reference mixture without SP. Moreover, the adsorption of the PCP-type SP on the ettringite is lower when compared to the PNS type SP.

The rheological results on mortars indicate that, for high  $C_3A$  level, the early fluidity increases as a function of the calcium sulfates solubility rate regardless of the type of SP. When the  $C_3A$  level is lower, dosage of SP is reduced and the cement dispersion is less sensitive to the nature of added calcium sulfates regardless of the type of SP.

# Effects of Shrinkage Reducing Admixtures on the Physical Mechanical Properties of Mortars

*Cerulli T., Pistolesi C., Maltese C., Salvioni D.*

**Mapei S.P.A.-Via Cafiero, 22-20158 Milano**

## Abstract

The shrinkage is one of the main reasons of failure of cementitious building materials (concrete, mortars, adhesive for tiles). Cracks formation or detachment are normally related with the high shrinkage of these products. Shrinkage reducing admixtures (SRA) improve the dimensional stability of hydrated cement. A study was carried out in order to better understand the effects of such admixtures on the physical mechanical and chemical properties of cementitious mortars. On this purpose specimens of mortars mixed with 10%, 5% and 0,5% (on the cement weight) of two different SRA were prepared. The samples were analysed by mechanical (compressive strength, total shrinkage, setting time, water evaporation), morphological (surface area determination by B.E.T. method, ESEM) and chemical (TG-DSC) tests.

# **THE INDIRECT EFFECTS OF THE USE OF MINERAL ADDITIVES IN THE DURABILITY AND MICROSTRUCTURE OF CONCRETE PASTE, EXPOSED TO ABRASION**

Roberto Uribe-Afif<sup>1</sup>, José Juan Flores-Martínez<sup>1</sup>

1. Centro de Tecnología Cemento y Concreto, Cementos Mexicanos, Tercera cerrada de Minas No 42, Col. Francisco Villa, Del. Alvaro Obregón, México Distrito Federal, Tel: (52) 56 26 83 15, Fax (52) 56 26 83 76, e-mail: [affif@cemex.com](mailto:affif@cemex.com), [jjflores@cemex.com](mailto:jjflores@cemex.com)

## **ABSTRACT**

At the present, the use of mineral additives in the manufacture of concrete, has become a common and familiar practice for people who are involved in structure design of this type of additives. This condition in certain cases has favored the relaxation in the measured preventive in the use of this type of additive when this material is considered like raw material in the concrete's production. This paper reviews and analyzes the structure concrete case and as consequence of its exposition conditions and service and the use of an addition mineral inorganic type. It presented a premature deterioration.

In the same one an analysis of the microstructure is presented and it permits certainly identify that is has been importantly affected by the inclusion in the concrete mixture of a specific component. The evaluation results and the employed criteria in the identification of the microstructure and their influence in the decrease of the durability are presented.

In the present job, was reviewed and analyzed a concrete one, in which for it was employed an addition of inorganic material to give it a specific color. The concrete one was placed as a floor that served as a bearing surface in a workshop, where the service condition consisted in automotive vehicles and persons traffic. In a period lower than 6 months the material presented an important deterioration that consisted in a mortar paste superficial disintegration and a concrete delamination.

# **THE STABILITY OF PYRITE IN CALCAREOUS AGGREGATE : INVESTIGATIONS IN OLD CONCRETE STRUCTURES**

Anne-Marie Marion, Jean Daube, Roland Smitz

Laboratoire Physico-Chimique

Centre de Recherches scientifiques et techniques pour l'Industrie Cimentière belge  
1050 Bruxelles - Belgique

## **ABSTRACT**

The literature has reported some cases where iron sulfide-bearing aggregates have contributed to threaten the concrete durability. The Tournasian silicified limestone has been suspected to cause secondary expansive reaction in concrete as a consequence of the presence of pyrite. A chemical analysis was performed on samples from old concrete structures, sound or affected by alkali-silica reaction (ASR). The objective was to quantify the sulfide and the sulfate concentrations, expressed as a function of the aggregate and cement content respectively, and to examine if those amounts could be considered as consistent with the expected values for cement and limestone. No tendency for increasing in sulfate and decreasing in sulfide was observed: keeping in mind that the oxidation would have, for certain, created a depletion in sulfide on behalf of a higher sulfate concentration, it could be suggested that the stability of pyrite in the heart of concrete was clearly established.

A further systematic microscopical study, in backscattered electrons mode, has been performed on polished sections taken out from those concretes concerned by chemical analysis, as well as additional ones, to investigate not only the state of pyrite present in aggregates, but also to identify any indications, which could point out some pyrite deterioration.

The cubic and "framboïdal" pyrite microformations give neither evidence of morphological change, nor any modification of the S/Fe ratio that would have indicated chemical transformation. No trace of gypsum, ettringite, of other typical components resulting from pyrite weathering (ferrous and/or ferric sulfates, iron hydroxides) was detected. The SEM study confirms the diagnosis of chemical analysis, to know the resistance to oxidation of pyrite in aggregate when those are embedded in mortar protective matrix.

# **A COMPREHENSIVE PETROGRAPHIC INVESTIGATION OF A SEVERELY DETERIORATED CONCRETE UTILITY VAULT**

*Derek Cong<sup>\*</sup>, Frank Serafin, Lawrence Roberts, Robert Comeau, and Michael Gardner*

W.R. Grace  
62 Whittemore Ave  
Cambridge, MA 02140

## **ABSTRACT**

Petrographic examination is a powerful and indispensable tool in assessing the quality of concrete and trouble shooting concrete problems. However, in dealing with complicated deterioration problems, traditional optical petrography is often not enough, and a comprehensive approach using petrography, chemical analysis, X-ray diffraction and scanning electron microscopy is required.

A more than 20-year old concrete utility vault was severely deteriorated. Corrosion of steels, sulfate attack and/or delayed ettringite formation (DEF) have been suspected as the causes of the deterioration. However, the evidence from a comprehensive investigation using thin section optical microscopy, X-ray diffraction (XRD) of secondary deposits, scanning electron microscopy (SEM) with energy dispersive X-ray analysis (EDX) and other techniques strongly suggests that acid leaching was the primary cause of the deterioration. Many details will be presented.

**KEY WORDS:** Petrography, acid leaching, sulfate attack, thin section, SEM

---

<sup>\*</sup> present address: WJE, 13581 Pond Springs Road, #107, Austin, TX 78729

FINITE ELEMENT STRESS COMPUTATIONS APPLIED TO IMAGES OF  
DAMAGED CONCRETE: A POSSIBLE NEW DIAGNOSTIC TOOL FOR  
CONCRETE PETROGRAPHY

P.E. Stutzman<sup>a</sup>, D.S. Bright<sup>b</sup>, and E.J. Garboczi<sup>a</sup>

National Institute of Standards and Technology

<sup>a</sup>Building Materials and <sup>b</sup>Surface and Microanalysis Science Divisions

Gaithersburg, Maryland 20899 USA

ABSTRACT

Concrete petrography is used to assess damaged concrete in order to determine the probable mechanism of damage. However, using traditional petrographic analyses, it is often difficult to say what mechanisms caused the crack damage, since many deterioration mechanisms produce cracks. This article describes a hybrid imaging-finite element modelling technique that can be used to help determine the mechanism of damage in such cases. This application is intended to assist concrete petrographers in the assessment of degradation mechanisms.

## INVESTIGATION OF FIRE-DAMAGED CONCRETE WITH DIFFERENT TYPES OF AGGREGATES

Pelin Türker      Korhan Erdogdu      Bahadir Erdogan

Turkish Cement Manufacturers' Association, Research and Development Institute  
PK2 06582 Bakanliklar / ANKARA - TURKEY  
email: pelint@tcma.org.tr

### ABSTRACT

Inspite of the fact that portland cement concrete is incombustible and give good resistance to elevated temperatures, heating due to fire or different causes will bring about physical and chemical changes in the structure of concrete. To repair fire damaged concrete, firstly, it is necessary to understand the extend of the effects of high temperatures on the concrete. Considering this, the current study is designed to visualise the effects of elevated temperatures on concrete microstructure and compressive strength. For this purpose, mortars with normal portland cement and three different aggregates were prepared. These aggregates were quartzite, limestone and pumice. The mortar specimens for compressive strength tests and SEM investigations were subjected to 100, 250, 500, 700 and 850°C for period of 4 hours including the temperature increase period. For SEM observations the same places in the samples before and after heating were investigated. This provides with the main advantage of the study which clearly shows the effect of heating on microstructure. As a result, changes in CSH, CH and aggregate, crack propagation and formation can be exactly identified on the same samples.

### ÖZET

Portland çimentosu içeren beton, yüksek sıcaklıklara karsi iyi dayaniklilik gösteren ve yanmaz bir malzeme olmasına ragmen, yangin ya da farkli sebeplerle olusan sıcaklik artisleriyle yapısında bazı fiziksel ve kimyasal degisiklikler gösterir. Yangından zarar görmüş betonun onarılmasında ilk olarak yüksek sıcaklıkların beton üzerinde ne mertebelerde etkili olduğu incelenmelidir. Bu durum göz önüne alınarak, bu çalışma yangına maruz kalan betonlarda mikroyapı ve dayanım degisikliklerini göz önüne sermek amacıyla yapılmıştır. Bu amaçla normal portland çimentosu ve 3 tip farkli agregası içeren harçlar hazırlanmıştır. Kullanılan agregalar; kuvarzıt, kireçtaşı ve bims'tir. Basınç dayanımı ve SEM incelemeleri için harç numuneleri, sıcaklık artis periyodu da dahil olmak üzere 4 saat süreyle 100, 250, 500, 700 ve 850°C sıcaklıklara tabi tutulmuştur. SEM incelemeleri için aynı numunenin aynı bölgeleri sıcaklığa tabi tutulmadan önce ve sonra incelenmiştir. Sıcaklığın mikroyapıya etkisinin aynı bölgede gösterilmesi bu çalışmanın sunduğu bir avantajdır. Böylelikle CSH, CH, agregası ve çatlak gelişmeleri net olarak incelenebilmektedir.

## **EFFECTS OF LITHIUM SALTS ON ASR GEL COMPOSITION AND EXPANSION OF MORTARS**

**Mitsunori Kawamura and Hirohito Fuwa**

**Department of Civil Engineering, Kanazawa University, Kanazawa, Japan**

### **ABSTRACT**

Suppression of ASR expansion in mortar and concrete by the addition of lithium salts has been confirmed by some workers. It has been revealed that lithium hydroxide tended to reduce the reaction between sodium or potassium hydroxide and silica, and ASR gels incorporating lithium was less expansive. However, it has not been reported how the addition of a lithium salt influenced the composition of ASR gel. The calcium in ASR gels is considered to play an important role in expansion of ASR gel. Thus, it is significant to reveal the characteristic of ASR gels composition in mortars containing lithium salts by the BSE-EDS analysis. This study aims at discussing the mechanisms of suppression of ASR expansion in mortar by lithium salts from the viewpoint of ASR gel composition. The average CaO/SiO<sub>2</sub> ratio in ASR gels decreased with increasing amounts of added lithium salts. It should be noted that the extent of variations in the CaO/SiO<sub>2</sub> ratio in ASR gels significantly decreased with increasing amounts of lithium salts. The addition of relatively small amounts of LiOH and Li<sub>2</sub>CO<sub>3</sub> resulted in increased expansion. We also obtained an unexpected result that ASR gels became homogeneous in their CaO contents at high dosage levels. However, the reduction in average CaO/SiO<sub>2</sub> ratios and the homogenization in CaO contents of ASR gels due to the addition of lithium salts may not be related to the expansion of mortars.

CONNECTION BETWEEN RHEOLOGICAL AND MICROSTRUCTURAL  
CHANGES DURING HYDRATION OF CEMENT PASTES.

Blask, O., Knöfel, D.

University of Siegen, Paul-Bonatz-Str. 9-11, D-57068 Siegen, Germany.

Šandor, M., Pakusch, J.

BASF Aktiengesellschaft, D-67056 Ludwigshafen, Germany

ABSTRACT

One of the most important quality requirements to a pasty building material is an easy workability which is described by the rheology. By rheology one understands the motion under operation of a force and/or the result of its interaction with the microstructure of the material. In order to affect the workability purposefully it is important to know exactly about the microstructure and their reaction to outside forces. A characteristic of cementitious building materials is the change of their microstructure by cement hydration. This stiffening is of crucial importance for the working time.

A aim of this work was the observation of the stiffening of cement pastes containing chemical admixtures both with rheological and with microscopic methods and from this the development of an improved understanding of the microstructure of cement pastes. For this - with oscillating rheometer measurements - the development of the microstructure was tested and the transition from the liquid state to a solid similar state was observed. With a rotational rheometer the increase of the yield value during the hydration was measured and the influence of mixing on the microstructure of partly hydrated cement pastes was tested. With microscopic methods the appearance of the microstructure was observed. Since the microstructure of soft pastes is easily destroyed, the samples were shock-frozen by liquid nitrogen and the pore solution was removed from the sample by sublimation. The results are SEM micrographs of a hardly changed three-dimensional microstructure.

# MORPHOLOGICAL VARIATION OF CEMENT PASTE MICROSTRUCTURE DUE TO THE USE OF ADMIXTURES.

*Fiorenza Cella, Tiziano Cerulli, Davide Salvioni, Sergio Stella.*

Mapei S.p.A. R & D Central Laboratory – via Cafiero 22, I-20158 Milano - Italy.

## **ABSTRACT**

It is our opinion, in agreement with several authors, that the final mechanical performances of cement based products depend mainly on the “reactions” that take place during the early hydration phase. The aim of this work is the study of the cement paste microstructure in the first 24 hours. We have considered several types of admixtures, including accelerators, retarders and superplasticizers, and we have observed their effect on the cement microstructure. The study has been carried out using an ESEM-FEG to characterize the morphology of the samples. The hydration kinetic and thermodynamic have been studied by XRD analysis and temperature variation, thus following the growing of hydration products and their thermal profile.

A dramatic improvement of the morphological details of the hydrating cement has been possible only with the use of ESEM-FEG, which allows the analysis of untreated samples, in the presence of significant amounts of residual water.

**MISINTERPRETATION OF X-RAY ELEMENTAL ANALYSES OF CONCRETE DUE  
TO FA AND SF CONTENTS**

**Stella L. Marusin  
Wiss, Janney, Elstner Associates, Inc.  
330 N. Pfingsten Road  
Northbrook, IL 60062**

**ABSTRACT**

Fly ash (FA) and silica fume (SF) are widely used as concrete admixtures. Their additions influence many physical and mechanical properties of fresh and hardened concrete and improve concrete durability. However, if studies of concrete failures are based only on scanning electron microscopy locations containing accumulated or fractured FA or SF can be misinterpreted, and based on X-ray elemental analysis, may erroneously be used to identify concrete composition and condition, perhaps leading to future failures. I have encountered such misinterpretation; examples are presented.

**Key Words:** Concrete, silica fume, fly ash, X-ray elemental analysis

## **ASTM C-114 QUALIFICATION TEST METHOD TO IMPROVE ANALYTICAL RESULTS USING THE FUSED BEADS TECHNIQUE**

Jimmy Blanchette and Marcel Dessureault  
Corporation Scientifique Claisse, Inc.  
2522, chemin Ste-Foy, Sainte-Foy (Quebec), Canada G1V 1T5

Freddy Slim  
Ciment Quebec, Inc.  
145, boul. du Centenaire, Saint-Basile (Quebec), Canada GOA 3G0

### **Abstract**

The 21<sup>st</sup> century offers a host of new challenges, especially in analytical chemistry, where quality standards become increasingly demanding. To meet those challenges, cement industries are among the first to have understood the interest of XRF analysis using fused beads technique. This method is well established as a quick and reliable method, which yields highly accurate and precise results. The purpose of this paper is to show how to qualify for ASTM C-114 certification using the fused beads technique for chemical analysis of hydraulic cement. Important considerations and most common problems that may be encountered will be discussed. A particular attention will be given to several reproducibility issues, often overlooked and misunderstood.

# CONCRETE CRACK REMEDIATION BY POLYURETHANE-IMMOBILIZED *BACILLUS PASTEURII*

Johnna K. Galinat<sup>1</sup>, V. Ramakrishnan<sup>2</sup>, and Sookie S. Bang<sup>1\*</sup>

<sup>1</sup>Department of Chemistry and Chemical Engineering

<sup>2</sup>Department of Civil and Environmental Engineering

South Dakota School of Mines and Technology, Rapid City, SD 57701

## **ABSTRACT**

This paper reports the results of the scanning electron micrography (SEM) analysis of concrete crack remediation by polyurethane (PU)-immobilized *Bacillus pasteurii* whole cells. In SEM, encapsulated bacterial cells were identified throughout PU polymer matrices with some clumps. During remediation, calcite precipitation appeared in PU matrices as well as between the polymer and the concrete, in which cells were embedded in growing calcite crystals. Calcite in PU showed little effect on the elastic modulus and the tensile strength of the polymer, but increased the compressive strengths of concrete cubes whose cracks were remediated with PU-immobilized cells.

---

**Key words:** SEM, polyurethane immobilization, calcite, concrete remediation,  
*Bacillus pasteurii*

---

\*Corresponding author

# SEM-INVESTIGATIONS ON THE MICROSTRUCTURE OF STEAM CURED BUILDING MATERIALS

Walk-Laufer, B. <sup>1)</sup>; Huber, M. <sup>2)</sup>; Hums, D. <sup>3)</sup>; Knöfel, D. <sup>1)</sup>; Zürn, S. G. <sup>3)</sup>

- 1) University of Siegen, Institute for Building Materials Chemistry, Paul- Bonatz-Str. 9-11, 57068 Siegen, Germany, e-mail: bernd.walk@student.uni-siegen.de
- 2) Institute for Mineralogy, Petrology and Geochemistry, Ludwig-Maximilians University Theresienstraße 41 /III, 80333 München, Germany
- 3) YTONG Holding AG, R&D Center, Sandhof 6, 86529 Schrobenhausen, Germany

## **ABSTRACT**

Hydrothermally hardened building materials are characterized by high compressive strength and –if of porous texture- good thermal insulation properties and workability. By the efforts to lower the energy consumption at the expense of fossil fuels heat insulating building materials gain increasingly in attractiveness.

In addition to the characteristics specified above further demands on the building material are placed. The quality of hydrothermally hardened building materials depend substantially on the chemical and mineralogical composition of the raw materials.

Previous investigations on these topics [ 1-3 ] showed that shrinkage (as one example) is strongly determined by the crystallinity of the 1,13 nm tobermorite, which is the main binding phase in most hardened materials. The scope of this work is twofold:

- Influence of the foreign cations  $Al^{3+}$  and  $K^{+}$  on the basic system  $CaO-SiO_2-H_2O$ .
- Application to industrially relevant systems

The samples were investigated by means of scanning electron microscopy (SEM), energy disperse x-ray-fluorecense (EDX) and electron microprobe analysis (EMPA).

Additionally x-ray diffraction and mercury intrusion porosimetry were applied to the hardened material.

The influence of the mineralogical phase composition and the microstructure on the physico- mechanical properties of the material is presented by selected examples.

# PHYSICAL AND CHEMICAL CHARACTERISTICS OF AGGREGATE MATERIAL PASSING THE MESH 75 mm (# 200) AND ITS INFLUENCE IN THE INHIBITION OF THE ALKALI – SILICA REACTIVITY IN MEXICO CITY

Roberto Uribe-Afif<sup>1</sup>, Rosa Elba Rodríguez-Camacho<sup>1</sup>, José Juan Flores-Martínez<sup>1</sup>, Homero Jesús Montaña-Roman<sup>1</sup>

1. Centro de Tecnología Cemento y Concreto, Cementos Mexicanos, Tercera cerrada de Minas No 42, Col. Francisco Villa, Del. Alvaro Obregón, México Distrito Federal, Tel: (52) 56 26 83 15, Fax (52) 56 26 83 76, e-mail: [affif@cemex.com](mailto:affif@cemex.com), [rerdz@cemex.com](mailto:rerdz@cemex.com), [jjflores@cemex.com](mailto:jjflores@cemex.com), [homerojmr@cemex.com](mailto:homerojmr@cemex.com).

## ABSTRACT

Alkali-silica reaction has always been considered a potential problem in concrete manufactured in Mexico City. However, a problem of this type has not been identified in this region in any structures made with these materials. This is surprising, especially when considering that all of the conditions necessary to promote ASR seem to be present. The present work characterizes the aggregates used and presents some case studies of concrete elements with more than 25 years of age. A series of hypothesis are presented to explain the absence of any significant ASR in concrete structures that appears to have all of the necessary elements for the development of ASR.

# AN AUTOMATED, IMAGE PROCESSING SYSTEM FOR CONCRETE EVALUATION \*

**DR. CHRIS W. BAUMGART**, Project Manager, Technology Development  
505-844-2585 (voice) 505-844-1915 (fax)  
*cbaumgart@kcp.com (e-mail)*

**DR. KIM DALTON LINDER**, Staff Engineer  
505-844-9927 (voice) 505-844-3751 (fax)  
*klinder@kcp.com (e-mail)*

**MR. STEVEN P. CAVE**, Technical Project Specialist  
505-844-5604 (voice) 505-844-3751 (fax)  
*scave@kcp.com (e-mail)*

©Honeywell Federal Manufacturing & Technologies, LLC, 2001  
PO Box 5250  
Albuquerque, NM 87185-5250

## **ABSTRACT:**

The determination of the microscopic properties, hence air-void system, in hardened concrete provides a valuable link to the durability and performance of concrete. Because of this, knowledge of the air-void structure in hardened concrete is a valuable tool. Current manual methods (ASTM C 457 linear-traverse or modified point-count) used to determine the air-void structure in hardened concrete are extremely time consuming, tedious, and require highly skilled, and experienced personnel. Automating the system saves both time and effort and improves the consistency and repeatability of the operation and its results. Previous efforts to develop an automated system, as such, have not produced to the degree of accuracy needed and required for total confidence. As a result, conventional, manual methods of evaluating hardened concrete remain in common use.

Since 1998, a cooperative effort between the Missouri Department of Transportation and Honeywell Federal Manufacturing & Technologies\*\* has made significant progress developing an automated, image analysis system with a baseline capability to determine the air-void structure in hardened concrete while addressing all inevitable conditions that can be encountered during hardened concrete analysis. This system automatically scans and collects microscope images of the surface of a sample of polished concrete, with very little interaction from the human operator. Analysis of the acquired imagery is then performed using customized image processing techniques to detect voids (and other components) in the concrete. Sixteen microscopic properties of the concrete, as defined by the ASTM standard, are estimated and reported to the user assessing the quality of the test sample. Complete development of this system is proposed enabling field implementation of concrete materials, construction, and research.

**Keyword I:** Machine Vision and Image Processing

**Keywords II:** Classification-Fusion, Computer Vision, Data-Analysis, Data-Fusion, Data-Visualization, Design-Automation, Feature-Extraction, Feature-Identification and Classification, Image-Data Acquisition, Image-Interpretation, Image-Processing, Machine-Vision, Machine-Vision and Image Processing, Matching-Fuzzy, Texture Classification

\*Patent Pending

\*\* Operated for the United States Department of Energy under Contract No. DE-ACO4-01AL66850

# THE MINERALOGY OF SULFATE AND SEA WATER ATTACK ON CONCRETE INTERPRETED FROM EPMA ANALYSIS

Duncan Herfort and Iver Allan Juel

Aalborg Portland

## ABSTRACT

A three year project investigating the mineralogical processes of sulfate and sea water attack of concrete is described. The aim of the project is to experimentally test a model which predicts that the mineralogy of concrete altered by chemical attack is governed by the existence of stable or metastable equilibrium within localized zones, even though a state of equilibrium does not exist across the entire system. The model is tested experimentally in the laboratory, and by detailed examination of concretes of wide ranging composition exposed to sea water for 18 years at an exposure site on the west coast of Denmark. Electron Probe Microanalysis (EPMA) results are presented in this paper which, although not providing independent confirmation of the above model, indicate the AFm phases to consist of monosulfate intimately mixed with the C-S-H phase, and a solid solution of Friedel's salt and monocarbonate. Ettringite, although regarded as part of the same phase assemblage, is found almost exclusively in original air voids. Ingress of chlorides to a depth of 100 mm from the concrete surface is markedly reduced in concrete containing fly ash. This seems at least in part to be the result of the greater binding capacity of the AFm solid solution phase.

## **A CASE STUDY OF ETTRINGITE INDUCED MICRO-CRACKING OF CONCRETE AT A WASTE WATER TREATMENT PLANT**

*Mansour A. Al-Shafei, Gassim H. Al-Sayoud  
Shameem Siddiqui, Aon A. Khamees  
Ahmed A. Al-Kaba, A. K. Al-Nowaishi  
Saudi Aramco, Dhahran, Saudi Arabia*

**Summary.** Saudi Aramco engineers observed micro-cracks at walls and slabs of Industrial Waste Water Treatment Plant after cementing jobs had been completed. These micro-cracks were also found to propagate as a function of time, thus indicating that the reactions causing the failure are also time dependent. Surface analyses instruments at R&D Center were used to determine the causes of concrete deterioration, and it was observed that ettringite, which is a hydrated calcium sulfoaluminate, formed after the cement was cured and caused the concrete to expand and crack. This delayed ettringite formation (DEF) results from high ambient temperature and high salinity water used during cementing and adversely affects cement/concrete strength, durability and integrity.

This paper discusses the nature of DEF in cement paste and at the aggregate /paste interfaces as observed by scanning electron microscopy (SEM) and computed X-ray tomography (CT Scan). Based on these observations, recommendations are made to minimize DEF induced micro-cracking of cement and concrete.

# **SULFATE ATTACK AS OBSERVED BY OPTICAL AND SCANNING ELECTRON MICROSCOPY**

Ulla Hjorth Jakobsen\* and Niels Thaulow\*\*

\*Concrete Experts International, Copenhagen, Denmark

\*\*RJ Lee Group, Monroeville, Pennsylvania, USA

## **ABSTRACT**

Sulfate attack can be divided into two groups, depending on the source of the sulfate, namely internal sulfate attack and external sulfate attack. Internal sulfate attack is a process where the sulfate is supplied from the concrete itself e.g. released from gypsum in aggregates or sulfate made available in the cement paste due to too high internal temperatures at early ages (Delayed Ettringite Formation, DEF). External sulfate attack occurs when sulfate penetrates the concrete from an external source such as ground water, sea water or sewage water. Combining optical and scanning electron microscopy in the study of the two types of sulfate attack elucidates different micro-structural features. An internal sulfate attack such as DEF can be recognized by the presence of gaps around aggregates, whereas an external sulfate attack leaves a pronounced zoning through the surface near part of the concrete. The paper describes case studies of the two main types of sulfate attack illustrated by photographs taken in the optical microscope and in the scanning electron microscope.

**DEPTH PROFILING AND PHASE DISCRIMINATION IN DETERIORATED  
CONCRTE UTILIZING SCANNING ELECTRON MICROSCOPY WITH  
AUTOMATED POINT COUNT ANALYSIS**

S. Sahu, A. Snyder, S. Badger, and R.J. Lee

RJ Lee Group, Inc.  
350 Hochberg Rd., Monroeville PA 15146  
[ssahu@rjlg.com](mailto:ssahu@rjlg.com)

**ABSTRACT**

Automated point count analysis utilizing scanning electron microscopy (SEM) associated with energy dispersive spectroscopy (EDS) allows for the discrimination of various phases by chemical composition. Phases are discriminated by energy dispersive spectroscopy with “rule” files developed for all phases of interest. Automatic control of the SEM stage and recording of coordinates also allows for the mapping of individual phases by location within a polished concrete section. In this manner, relative quantities of each phase (i.e. ettringite, monosulfate, CSH) may be plotted with respect to depth of the concrete from the surface. Automation of the analysis is achieved by fixing an array of points over selected “standard” magnified paste images. The computer then obtains EDS data from each point within a given image. Images and EDS point data can be electronically stored for subsequent review. Therefore, the frequency with which a given phase coincides within the regular grid system of points allows variations in paste composition to be observed. Comparisons of automated to manual SEM analysis are presented.

# **IMPACT OF AMORPHOUS AND CRYSTALLINE SILICA ON PYROPROCESSING**

Jessica Carrillo Morris

Lafarge Midwest  
Joppa, Illinois USA

## **ABSTRACT**

Two industrial raw mix test burns were performed on a long, dry (16 ft. by 19 ft. by 540 ft.) Type I cement kiln with a 1 stage preheater; this system burns a coal/coke blend delivered by an indirect firing system. An amorphous silica and microcrystalline silica were substituted for the standard quartz silica in the mix.

This paper provides an evaluation of the impact on the pyroprocessing of the two raw mixes and the affect of quartz greater than 45  $\mu\text{m}$  on the raw mix burnability. To evaluate the raw mix, the parameters of specific heat consumption, production rate, rate of dust wasting, and microscopy are discussed.

**RELATIONSHIP BETWEEN MECHANICAL PROPERTIES AND  
MICROSTRUCTURE OF CEMENT SLURRIES WITH FIBER FOR  
MULTILATERAL WELLS**

**Aiskely Blanco, Astrid Centeno, 000000Christian Cadenas and Juan Soto**  
PDVSA INTEVEP, P.O.BOX 76343, CARACAS 1070-A, Venezuela

**1. ABSTRACT**

Multilateral wells are more prone to problems of loss zone isolation during their productive lives than normal wells. Cement systems used in this case have to withstand additional loads and may suffer critical disintegration and/or debonding from the tubular or formation. Several special additives are under test and employed in the petroleum industry, all aiming to improve the mechanical properties of cement sheaths in multilateral wells, and thus assure the hydraulic integrity along the well over its production life.

In this study, mechanical properties such as Young's modulus, flexural strength and Poisson's ratio of cement systems containing fibers are evaluated and correlated with the resulting cement crystallographic microstructure, at different curing temperatures and pressure loads.

INTERNATIONAL CEMENT MICROSCOPY ASSOCIATION  
MICROSCOPY OF CEMENT AND CONCRETE

TWENTY-THIRD INTERNATIONAL CONFERENCE ON CEMENT MICROSCOPY  
April 29-May 3, 2001  
Sheraton Uptown  
Albuquerque, New Mexico

"IN-HOUSE" DIGITAL IMAGE ANALYSIS SOFTWARE  
A COMPARISON STUDY, FOR A FAST AND RELIABLE AUTOMATIC MICROSCOPY  
ANALYSIS.

**Chem. Eng. Alfredo Santos-Arceo**

**Chem. Eng. Conrado Gaytán**

**Materials and Processes Department; CEMEX Technology Division.  
Monterrey, Nuevo León; MEXICO.**

**ABSTRACT**

This paper presents the results of a deep study to evaluate the feasibility of the Image analysis using software tools developed within CEMEX. MICRODIP (Microscopy Digital Image Processing), was programmed few years ago, after a series of improvements and tests, and with a strong program to promote the microscopic methods in the plants, it has been more accepted in the operations.

Right now this tool is more mature and proven and it has been installed in different plants in Mexico and Spain; the study comprised here, describes how this working tools align with the company's direction and it also shows the results of evaluating this tool against normal manual microscopy analysis in different plants and with different clinker samples, highlighting facts such as analysis time, standarization of the analysis and error analysis.

The purpose of this study was to prove the functionality and advantages of the software against normal procedures and commercial softwares, as part of one of the big efforts within the company: the process control through microscopic methods.

**SEM MICROSTRUCTURAL STUDIES OF CEMENTITIOUS MATERIALS:  
SAMPLE PREPARATION OF POLISHED SECTIONS AND MICROSTRUCTURAL  
OBSERVATIONS WITH BACKSCATTERED IMAGES – ARTEFACTS AND  
PRACTICAL CONSIDERATIONS**

A.K. CRUMBIE, Lafarge Central Research Laboratory  
St. Quentin Fallavier, FRANCE

**ABSTRACT**

For successful SEM studies of cementitious materials the processes involved in the sample preparation of polished sections need to be carefully considered and applied. Significant artefacts can result from the preparation processes and specific examples of this are given. Some practical considerations are discussed for SEM bse observations of the «real» microstructure and also for reliable EDS microanalyses.

# **In-situ Observation of Lime Paste Carbonation in CO<sub>2</sub> Environment Scanning Electron Microscopy (ESEM)**

**Mileva Radonjic (1) and Adrian Hughes (2)**

(1) University of Bristol, Interface Analysis Centre, 121. St. Michaels Hill, Bristol, UK

(2) Imerys Minerals Ltd., Central Research Lab., Par Moor, St. Austell, Cornwall, UK

**Corresponding author email address: [mileva.radonjic@bris.ac.uk](mailto:mileva.radonjic@bris.ac.uk)**

The setting of lime-based mortars is attributed to the process of carbonation but the rate and mechanism of this reaction has yet to be accurately defined experimentally.

Here we report an *in-situ* observation of the carbonation of lime paste within the analysis chamber of an Environmental Scanning Electron Microscope (ESEM). Changes in the microstructure of the lime paste surface induced by the flow of CO<sub>2</sub> or CO<sub>2</sub>-rich water vapour have been carefully monitored during initial stages.

Initial results show not only the rate at which Portlandite converts to calcium carbonate but also the parameters influencing the mechanism of the reaction. Environmental scanning electron microscopy can provide *in-situ* microstructural and micro-chemical characterisation of the dynamic surface changes of materials exposed to various environments.

# **Fused Beads for Better XRF Analytical Results in Cement Application**

Michel Davidts, Lic.Sc.Chim.